

Product Specification

UK Model No. - RLF8Y

**GPH – 1 US Gallon = 3.7 litres
This model is supplied in 240v**



WATER CHILLERS

REMOTE OR IN-A-WALL CHILLING PACKAGE



Model

- RLF8 is an efficient chilling unit for in-a-wall or remote installation.

Standard Features

- ▶ Waterways Are Lead-Free in Materials & Construction
- ▶ Made of Heavy Gauge Steel
- ▶ High-Efficiency Cooling Tank and Coil
- ▶ Refrigerant 134a
- ▶ Limited 5-Year Warranty

Installation

- ▶ Wall-mounting cradle and stainless steel ventilating grille are available at extra cost for in-a-wall installation
- ▶ Shipped with complete instructions

Accessories

- Wall Mounting Cradle and Stainless Steel Grille (030101-001)
- Shelf Support (026929)

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years from date of installation on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample copy available upon request.

Components in chilling packages are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.



Model covered by these specifications comply with all known Plumbing Codes. Listed by Underwriters' Laboratories. Certified by Canadian Standards Association.

Export Warranty: One year on component parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.


Model	50° F Drinking Water 90° F Ambient Air Temp.		115 Volts, 60 Hz			Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Compr. HP	Full Load Amps	Rated Watts	
RLF8**	8.0	8.0	1/5	4.6	340	49 Lbs

Rating Condition 80 F inlet water temperature.

**Special Export models available, operable on 220-240 volts, 50/60 Hertz. UL and CSA certification not applicable.

Specifications are subject to change without notice.

Water Chiller Model RLF8

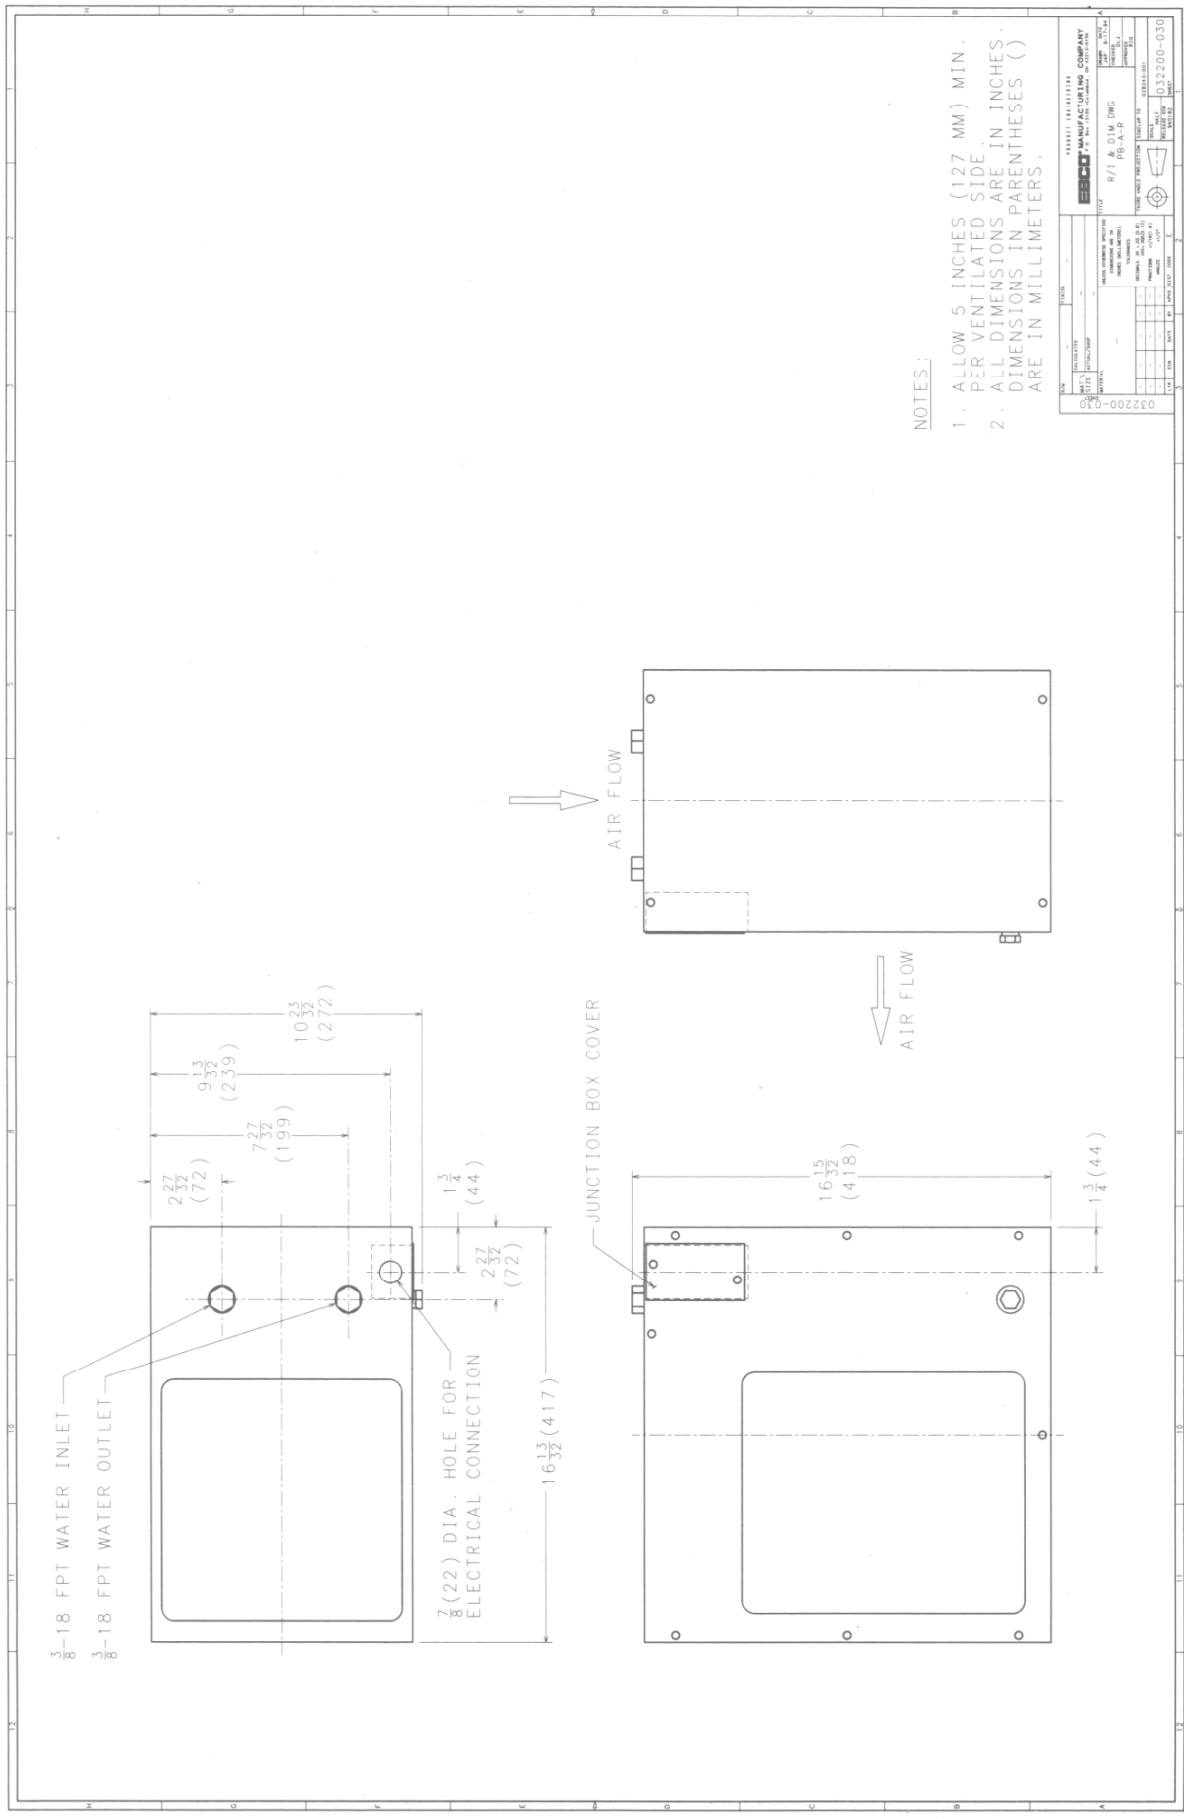

Specifications are subject to change without notice.

OASIS CORPORATION
 265 N. Hamilton Rd. • P.O. Box 13150
 Columbus, OH 43213-0150 U.S.A.

